


PRODUCT SHEET

8-CONDUCTOR CABLE

The 8-Conductor Cable connects the SageGlass Symphony™ Control Panel to the Terminal Box in installations where the insulating glass units (IGUs) and the Control Panel are more than 38 meters apart.

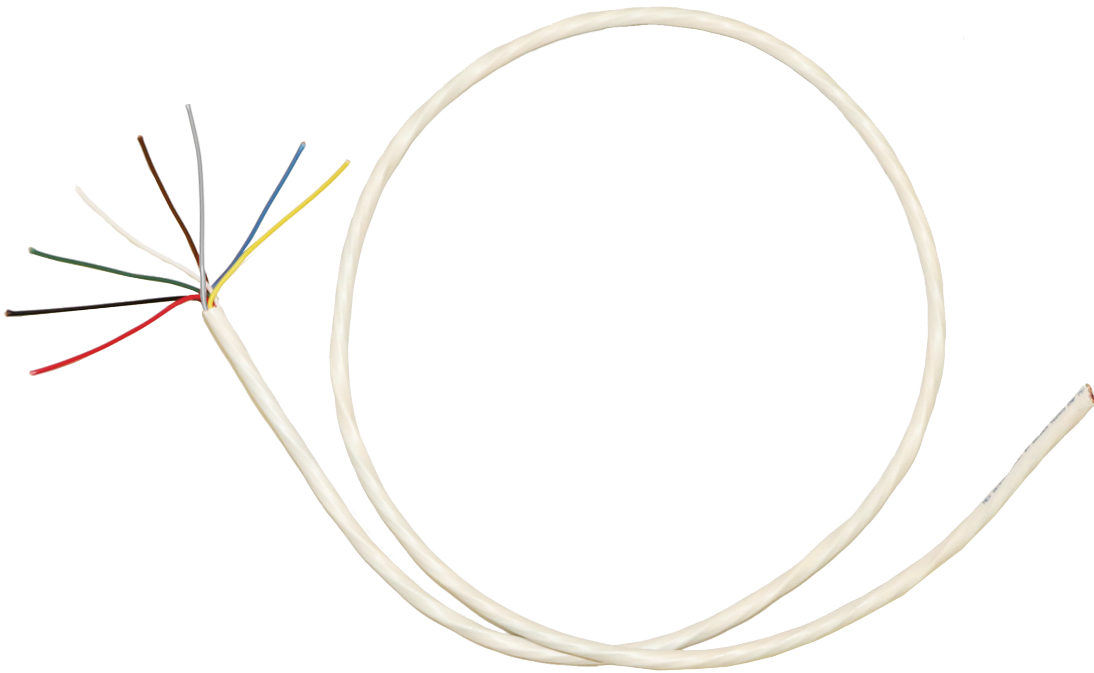

PRODUCT DIMENSIONS

Part Number	Wire Gauge	Nominal Diameter	Sheathing Colour	Spool Length
330-0127-001	1.5 mm ²	10 mm	White	150 m
330-0127-002	1.5 mm ²	10 mm	White	300 m


Temperature rated -20 °C to 70 °C

PRODUCT RATINGS

Halogen free
CPR Class B2_{CA}-s1, d1, a1



WIRE COLOURS

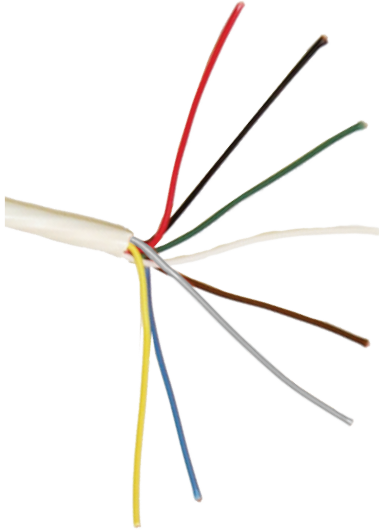

Primary Colour
Red
Black
White
Green
Brown
Grey
Blue
Yellow

INSTALLATION REQUIREMENTS

The cables should never be installed below -20° C ambient temperature. Once installed, the cables must not be exposed to sunlight, even through glass. If they are installed in an exposed location, they must be covered or painted (latex/water-based paint only). Non-adherence to these guidelines will void the warranty.

WHY SAGEGLASS?

1,000+
Installations

27+
Countries

1,000+
Patents

SageGlass® is the pioneer of the world's smartest dynamic glass. Electronically tintable SageGlass tints or clears automatically to optimize daylight levels while preventing heat and glare without the need for blinds or shades. SageGlass delivers superior comfort, enhances occupant well-being and saves energy. As part of Saint-Gobain, SageGlass is backed by more than 350 years of building science expertise that only the world leader in sustainable environments can provide.

For additional product and instructional information, visit: sageglass.com/resources

