


PRODUCT SHEET

FRAME CABLE

The SageGlass® Frame Cable connects the SageGlass insulating glass units (IGUs) to the control system. It can be ordered in a variety of lengths and conductor configurations to meet specific installation requirements. The plenum rated, PVC-insulated Frame Cable wires are 22 AWG.



PRODUCT DIMENSIONS

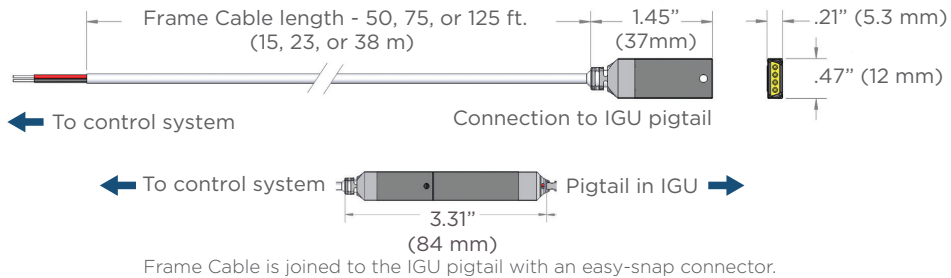

Part Number	Cable Length	Conductors	Nominal Diameter
330-0007-007	15 m	2	3,0 mm
330-0011-007		4	3,5 mm
330-0007-008	23 m	2	3,0 mm
330-0011-008		4	3,5 mm
330-0007-010	38 m	2	3,0 mm
330-0011-010		4	3,5 mm

Temperature rated -20 °C to 75 °C.

PRODUCT RATINGS

Plenum rated




INSTALLATION INSTRUCTIONS

To protect the cable from damage while routing it through the framing system, use the grommets provided. A 10 mm hole is required to install grommet. Frame Cables should be conditioned for 24 hours at room temperature prior to installation. The cables should never be installed below 0°C ambient temperature. Once installed, the cables must not be exposed to sunlight, even through glass. If they are installed in an exposed location, they must be covered or painted (latex/water-based paint only). Non-adherence to these guidelines will void the warranty.

CONDUCTOR COUNT

Correct cable (2C or 4C) must be used per wiring/elevation diagram.

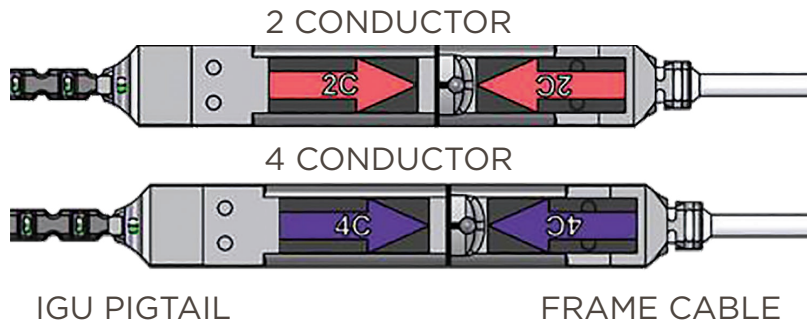

WHY SAGEGLASS?

1,000+
Installations

27+
Countries

560+
Patents

SageGlass® is the pioneer of the world's smartest dynamic glass. Electronically tintable SageGlass tints or clears automatically to optimize daylight levels while preventing heat and glare without the need for blinds or shades. SageGlass delivers superior comfort, enhances occupant well-being and saves energy. As part of Saint-Gobain, SageGlass is backed by more than 350 years of building science expertise that only the world leader in sustainable environments can provide.

For additional product and instructional information, visit: sageglass.com/resources