


PRODUCT SHEET

8-CONDUCTOR CABLE

The 8-Conductor Cable connects the SageGlass Symphony™ Control Panel to the Terminal Box in installations where the insulating glass units (IGUs) and the Control Panel are more than 125 feet apart. The plenum rated 8-Conductor Cable is 16 AWG.

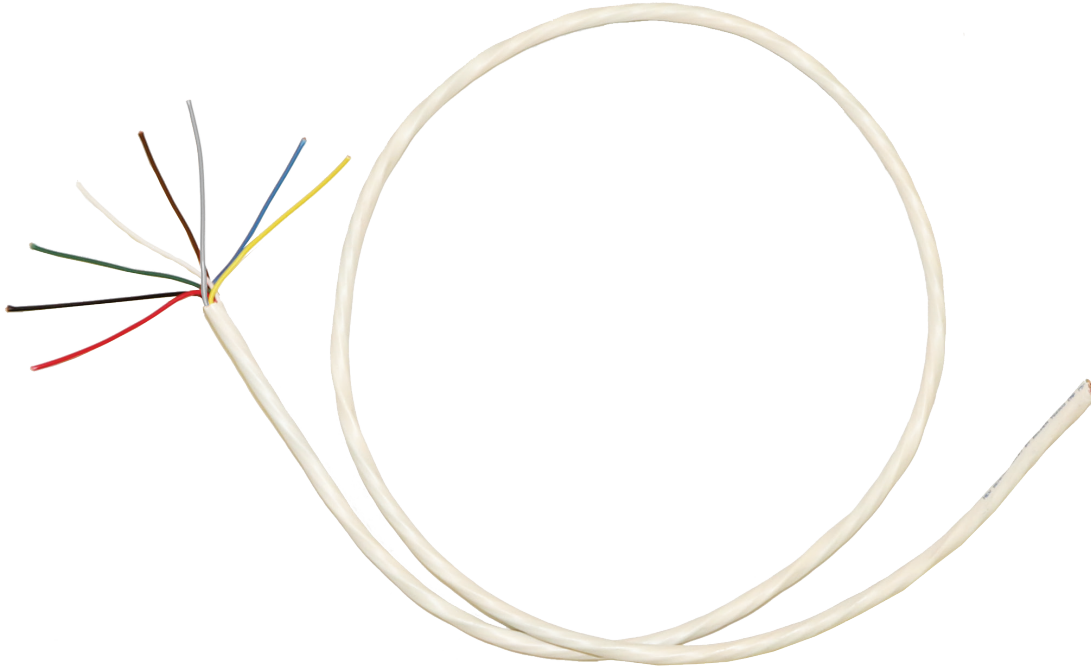

PRODUCT DIMENSIONS

Wire Gauge	Sheathing Color	Nominal Diameter
16 AWG	White	0.32" (8.12 mm)


Temperature rated -4 to 167 °F

PRODUCT RATINGS

Plenum rated



WIRE COLORS

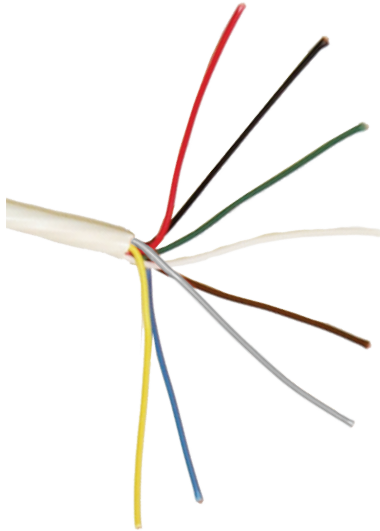

Primary Color
Red
Black
White
Green
Brown
Gray
Blue
Yellow

INSTALLATION REQUIREMENTS

8-Conductor Cables should be conditioned for 24 hours at room temperature prior to installation. The cables should never be installed below 32° F ambient temperature. Once installed, the cables must not be exposed to sunlight, even through glass. If they are installed in an exposed location, they must be covered or painted (latex/water-based paint only). Non-adherence to these guidelines will void the warranty.

WHY SAGEGLASS?

1,000+
Installations

27+
Countries

560+
Patents

SageGlass® is the pioneer of the world's smartest dynamic glass. Electronically tintable SageGlass tints or clears automatically to optimize daylight levels while preventing heat and glare without the need for blinds or shades. SageGlass delivers superior comfort, enhances occupant well-being and saves energy. As part of Saint-Gobain, SageGlass is backed by more than 350 years of building science expertise that only the world leader in sustainable environments can provide.

For additional product and instructional information, visit: sageglass.com/resources

