

# PRODUCT SHEET

## POE ETHERNET SWITCH

The Ethernet Switch provides network communication between components within the SageGlass Symphony system. In addition, it provides Power over Ethernet (PoE) to the Rooftop Sky Sensor, Façade Sensor and Wall Touch Panel.



### PRODUCT DIMENSIONS

Dimensions			Power Requirements		
Width	Length	Height	Voltage	Frequency	Peak Power
11.6"	7.1"	1.7"	100-240 VAC	50/60 Hz	45W

Conditioned space: 32-104 °F; 10-90% relative humidity, non-condensing

### PART NUMBERS

Part Number	Plug Type	Used in countries, such as:
300-1191-001	B	Canada, Japan, Mexico, United States
300-1191-002	C	Bolivia
300-1191-003	D	India
300-1191-004	E	Belgium, Czech Republic, France, Poland
300-1191-005	F	Germany, Netherlands, South Korea, Spain
300-1191-006	G	Kuwait, Qatar, Saudi Arabia, Singapore, UAE, UK
300-1191-007	I	Australia, China, New Zealand
300-1191-008	J	Switzerland
300-1191-009	K	Denmark
300-1191-010	L	Italy
300-1191-011	N	Brazil

### PRODUCT RATINGS



## PACKAGE INCLUDES

1. Ethernet Switch
2. AC Power Cord
3. Mounting Hardware
  - Brackets, screws, rubber feet

## TOOLS AND MATERIALS REQUIRED

1. Phillips Screwdriver (if wall or rack mounting)
2. Ethernet cable
3. Additional screws depending on mounting method

## SYSTEM REQUIREMENTS

The PoE Ethernet Switch provides a network to allow the Wall Touch Panel, Sensors and Industrial Computer to communicate to each other.

- For commercial applications, use Ethernet cables, category CAT5e or above.
- For residential applications, use shielded Ethernet cables, category CAT5e or above.

## INSTALLATION

### STEP 1: MOUNTING THE SWITCH

#### DESKTOP


1. Remove the adhesive backing papers from the rubber feet.
2. Turn over the device and attach the supplied rubber feet to the recessed areas on the bottom at each corner of the device.

#### RACK (To install the device in an EIA standard-sized, 19-inch rack)

1. Secure the supplied rack-mounting brackets to each side of the device with supplied screws.
2. Use suitable screws (not provided) to secure the brackets to the rack.

#### WALL

1. Secure the supplied rack-mounting brackets to each side of the device with supplied screws.
2. Use suitable screws (not provided) to secure the brackets to the wall.

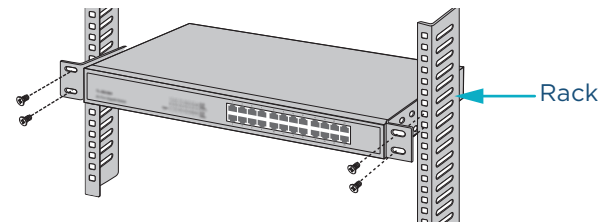


### STEP 2: CONNECTING TO THE SYSTEM

1. Insert Ethernet cables from other SageGlass Symphony components (Control Panel, Rooftop Sky Sensor, Facade Sensor, Wall Touch Panel, and Industrial Computer) into any port on the PoE Ethernet Switch.

### STEP 3: POWERING THE DEVICE

1. Plug the power cord into the power socket of the PoE Ethernet Switch.
2. Plug the other end of the power cord into a power outlet.
3. Verify front panel lights turn on.

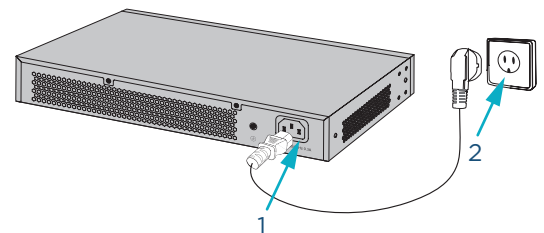

## WHY SAGEGLASS?

**1,000+**  
Installations

**27+**  
Countries

**560+**  
Patents

SageGlass® is the pioneer of the world's smartest dynamic glass. Electronically tintable SageGlass tints or clears automatically to optimize daylight levels while preventing heat and glare without the need for blinds or shades. SageGlass delivers superior comfort, enhances occupant well-being and saves energy. As part of Saint-Gobain, SageGlass is backed by more than 350 years of building science expertise that only the world leader in sustainable environments can provide.

For additional product and instructional information, visit: [sageglass.com/resources](https://sageglass.com/resources)