

# Product Sheet: Firewall

The Firewall provides an additional level of network security which monitors incoming and outgoing network traffic, allowing communication only between the SageGlass Symphony™ system and the SageGlass Cloud. Additionally, if a building management system (BMS) is used, it will connect to the rest of SageGlass Symphony through the Firewall.



## Product Dimensions

Dimensions			Power Requirements		
Width	Length	Height	Voltage	Frequency	Peak Power

4.4"	3.5"	1.1"	100-240 VAC	50/60 Hz	10 W
------	------	------	-------------	----------	------

Conditioned space: -40 - 140°F; 10-90% relative humidity, non-condensing

## Part Numbers

Part Number	Plug Type	Used in countries, such as:
300-1194-001	B	Canada, Japan, Mexico, United States
300-1194-002	C	Bolivia
300-1194-003	D	India
300-1194-004	E	Belgium, Czech Republic, France, Poland
300-1194-005	F	Germany, Netherlands, South Korea, Spain
300-1194-006	G	Kuwait, Qatar, Saudi Arabia, Singapore, UAE, UK
300-1194-007	I	Australia, China, New Zealand
300-1194-008	J	Switzerland
300-1194-009	K	Denmark
300-1194-010	L	Italy
300-1194-010	N	Brazil

## Product Ratings



## Package Includes

1. Firewall
2. Power Adapter

## Tools and Materials required

1. Screwdriver (if wall mounting)
2. Mounting Screws (if wall mounting)

## System Requirements

The Firewall connects to the SageGlass Symphony system via Ethernet.

- For commercial applications, use Ethernet cables, category CAT5e or above.
- For residential applications, use shielded Ethernet cables, category CAT5e or above.

## Installation

### Step 1: Mounting the Firewall (Optional)


1. Measure distance of mounting holes on the back of the Firewall.
2. Select proper screw length and head diameter for surface to be mounted.
3. Fasten screws into wall with the screwdriver in the orientation to be mounted, leaving enough distance from the base of the screw head to the wall so that the Firewall can be secured.
4. Place Firewall mounting holes over the screw heads and push down to secure Firewall in place.

### Step 2: Connecting to the System

1. Insert Ethernet cable from the Industrial Computer (SageGlass Maestro™) into LAN2 (labeled Industrial Computer).
2. Insert Ethernet cable from the internet source (Cell Modem or network guest access) to PoE in (labeled Internet).

### Step 3: Connect Power

1. Insert Power Adapter into the Firewall via the power port.
2. Insert Power Adapter into power outlet.

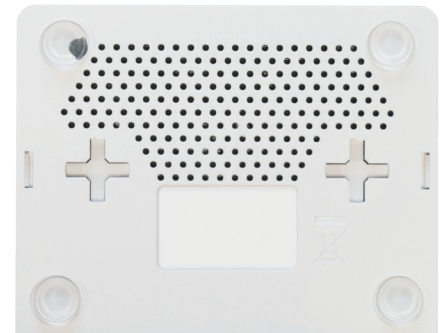

Not all  
smart glass  
is created equal

1,300+  
Installations

1,300+ Patents    27+ Countries

30+  
Years

SageGlass® is the world leader in smart glass. Our electrochromic glass tints and clears automatically to offer all the benefits of glass without the downsides of blinds and shades. Design gorgeous views that optimize daylight and comfort without excessive heat or glare. SageGlass solutions also improve building performance and reduce energy use. As a Saint-Gobain company, SageGlass is part of a group that spans 70 countries and 350 years of building science expertise.

For additional product and instructional information, visit:  
[sageglass.com/resources](https://sageglass.com/resources)



SageGlass®, SageGlass LightZone®, SageGlass Harmony®, SageGlass Symphony®, and SageGlass Maestro® are trademarks of SAGE Electrochromics, Inc., and may be registered in the United States and other countries. MKT-191.1

